

Capacitors for Power Electronics

FPCL SERIES

Please request specifications for consideration.
If you send the email to "Contact us", we will send it.

- Metallized polypropylene film capacitor
- For DC-Link, DC filter, Smoothing, etc.

Long life, High voltage, High current

Please consider the film capacitor to alternative electrolytic capacitor.

Performance


Item	Performance
Temperature range	-40~+70°C (+85°C) +70°C~+85°C Voltage derating
Rated Voltage (U _R)	630, 800V, 1100V, 1300V _{DC}
Capacitance range	1~65 μF
Capacitance tolerance	±5% (J)
Insulation resistance (IR)	≥ 10000 Ω·F (500 VDC for 1min)

Standard dimensions table (FPCL 630V)

(mm)

Parts cord	Rated voltage (V _{DC})	Capacitance (μF)	Cap. tolerance (%)	A ±1.0	B ±1.0	L ±1.0	P1 ±0.5	P2 ±0.5	φd	Permissible Current (Peak) I _{op} (A)
FPCL630V505J-C	630	5	±5	15.0	25.0	31.5	27.5	-	1.0	200
FPCL630V705J-C		7		15.0	25.0	31.5	27.5	-	1.0	280
FPCL630V106J-C		10		18.0	28.0	31.5	27.5	-	1.0	400
FPCL630V156J-C		15		21.0	32.0	31.5	27.5	-	1.0	600
FPCL630V206J-C		20		18.5	35.5	41.5	37.5	10.2	1.2	400
FPCL630V256J-C		25		21.5	38.5	41.5	37.5	10.2	1.2	500
FPCL630V306J-C		30		24.0	44.0	41.5	37.5	10.2	1.2	600
FPCL630V356J-C		35		24.0	44.0	41.5	37.5	10.2	1.2	700
FPCL630V406J-C		40		30.0	45.0	41.5	37.5	10.2	1.2	800
FPCL630V456J-C		45		30.0	45.0	41.5	37.5	10.2	1.2	900
FPCL630V506J-C		50		25.0	45.0	57.5	52.5	10.2	1.2	500
FPCL630V556J-C		55		25.0	45.0	57.5	52.5	10.2	1.2	550
FPCL630V606J-C		60		30.0	45.0	57.5	52.5	10.2	1.2	600
FPCL630V656J-C		65		30.0	45.0	57.5	52.5	20.3	1.2	650

Component outline

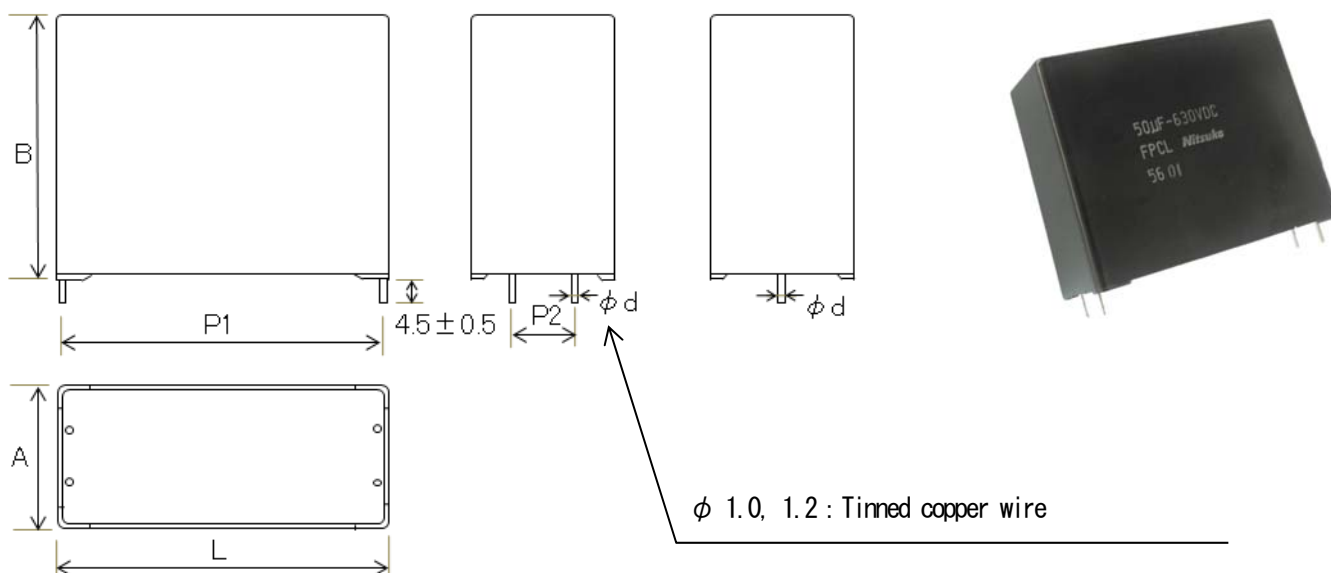

Capacitors for Power Electronics

FPCL SERIES [Low height type]

•If there is a height restriction, it is the best




Standard dimensions (FPCL 800V)

(mm)

Parts cord	Rated voltage (V _{DC})	Capacitance (μF)	Cap. tolerance (%)	A ±1.0	B ±1.0	L ±1.0	P1 ±0.5	P2 ±0.5	φd	Permissible Current (Peak) I _{op} (A)
FPCL800V106JB-C	800	10	±5	33.0	16.5	41.5	37.5	10.2	1.0	250
FPCL800V156JB-C		15		33.0	16.5	57.5	52.5	20.3	1.2	180
FPCL800V206JB-C		20		45.0	16.5	57.5	52.5	20.3	1.2	240

Component outline

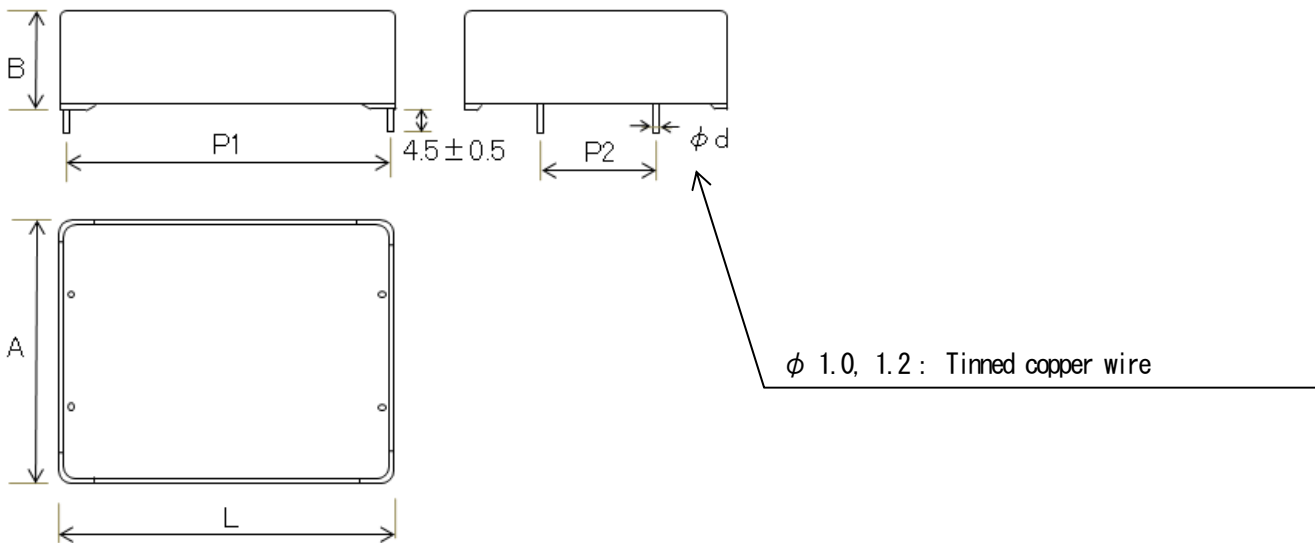

Capacitors for Power Electronics

FPCL SERIES

Long life, High voltage, High current

- Metallized polypropylene film capacitor
 - For DC-Link, DC filter, Smoothing, etc.
- Please consider the film capacitor to alternative electrolytic capacitor.


■ Standard dimensions (FPCL 1100V) (mm)

Parts cord	Rated voltage (V _{DC})	Capacitance (μF)	Cap. tolerance (%)	A ±1.0	B ±1.0	L ±1.0	P1 ±0.5	P2 ±0.5	φd	Permissible Current (Peak) I _{op} (A)
FPCL1100V105JB-C	1100	1.0	±5	11.0	22.0	30.5	27.5	-	0.8	75
FPCL1100V305JB-C		3.0		18.0	28.0	31.5	27.5	-	1.0	225
FPCL1100V505JB-C		5.0		21.0	32.0	31.5	27.5	-	1.0	375
FPCL1100V705JB-C		7.0		18.0	35.5	41.5	37.5	10.2	1.2	140
FPCL1100V106JB-C		10		21.5	38.5	41.5	37.5	10.2	1.2	200
FPCL1100V156JB-C		15		30.0	45.0	41.5	37.5	10.2	1.2	300
FPCL1100V206JB-C		20		25.0	45.0	57.5	52.5	10.2	1.2	140
FPCL1100V256JB-C		25		30.0	45.0	57.5	52.5	10.2	1.2	175

■ Standard dimensions (FPCL 1300V) (mm)

Parts cord	Rated voltage (V _{DC})	Capacitance (μF)	Cap. tolerance (%)	A ±1.0	B ±1.0	L ±1.0	P1 ±0.5	P2 ±0.5	φd	Permissible Current (Peak) I _{op} (A)
FPCL1300V105JB-C	1300	1.0	±5	11.0	22.0	30.5	27.5	-	0.8	100
FPCL1300V305JB-C		3.0		21.0	32.0	31.5	27.5	-	1.0	300
FPCL1300V505JB-C		5.0		18.5	35.5	41.5	37.5	10.2	1.2	250
FPCL1300V705JB-C		7.0		21.5	38.5	41.5	37.5	10.2	1.2	350
FPCL1300V106JB-C		10		25.0	45.0	41.5	37.5	10.2	1.2	500
FPCL1300V156JB-C		15		25.0	45.0	57.5	52.5	10.2	1.2	150

■ Component outline

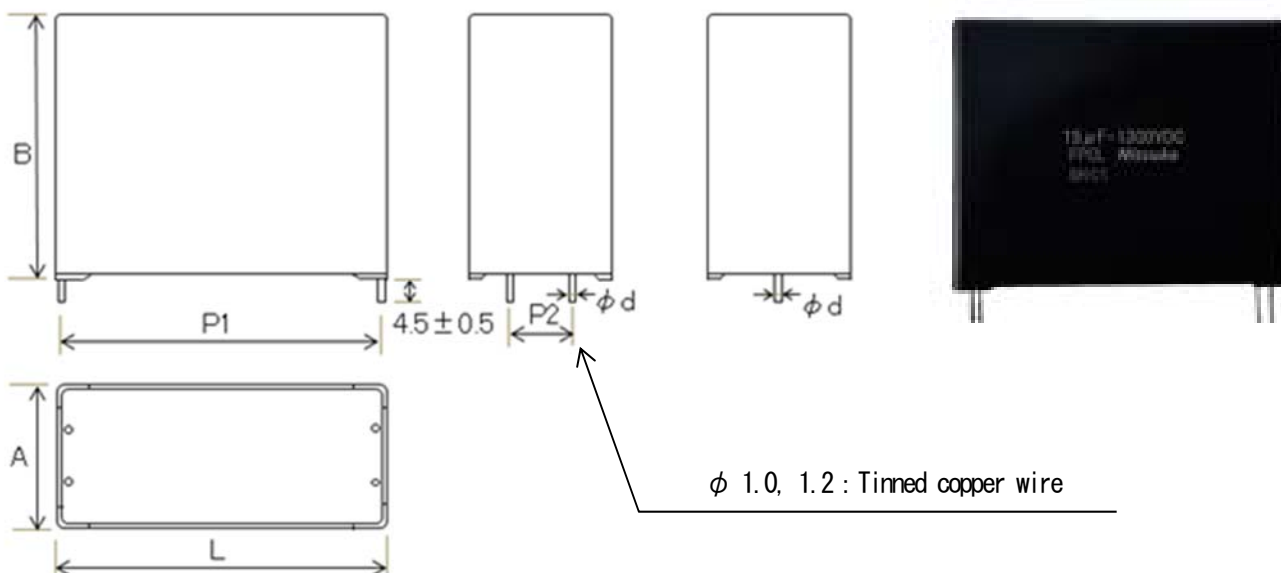

Capacitors for Power Electronics


■ Performance

- FPCL series is for DC voltage only, can not be used with AC
Please use in following (Applied voltage fluctuation from peak to peak)

- Voltage fluctuation





DC only (It cannot be used for AC)

Please use the voltage fluctuation within the range below

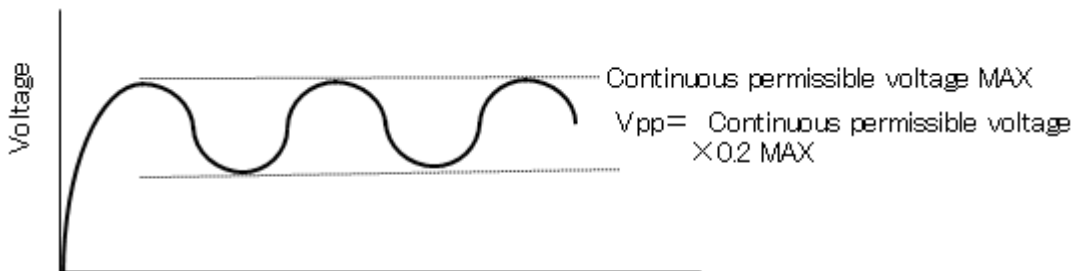




- Continuous applied voltage

$$\text{Derating rate (\%)} = \frac{\text{Continuous applied voltage}}{\text{Rated Voltage}} \times 100$$

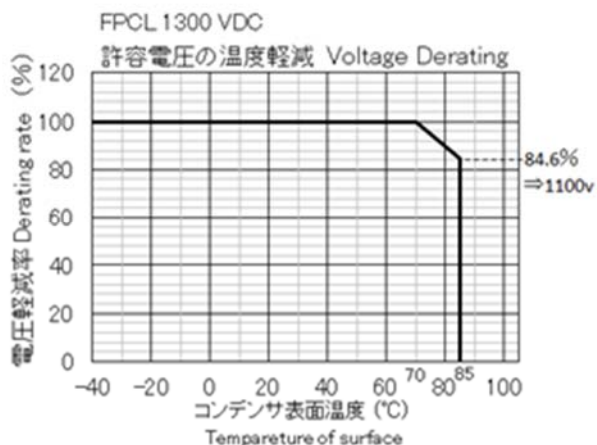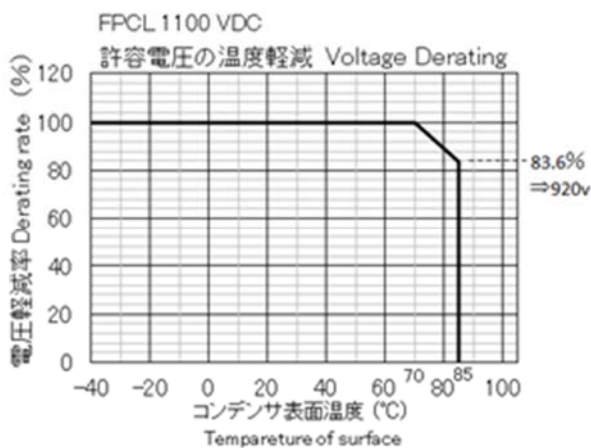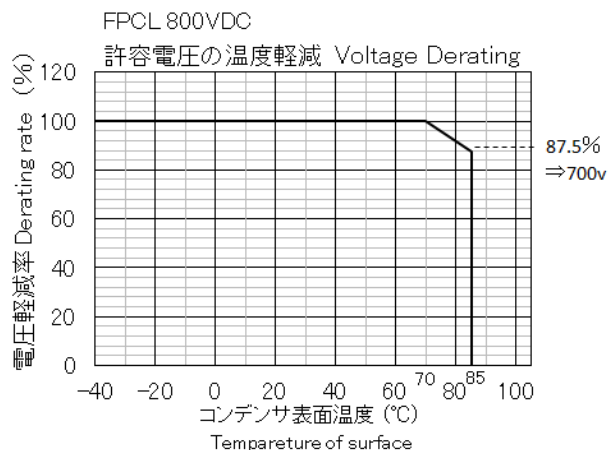
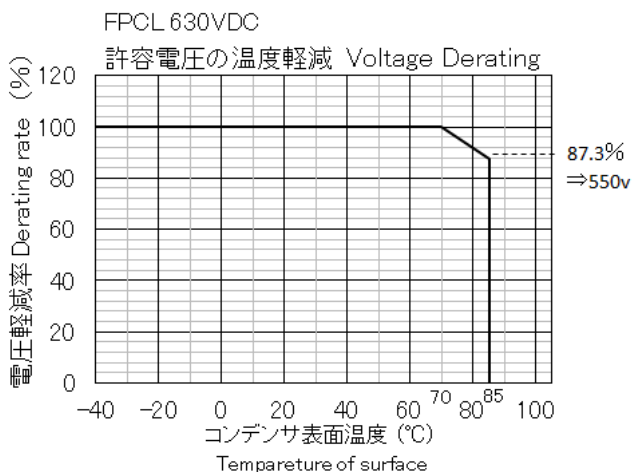


Capacitors for Power Electronics

- Permissible effective current

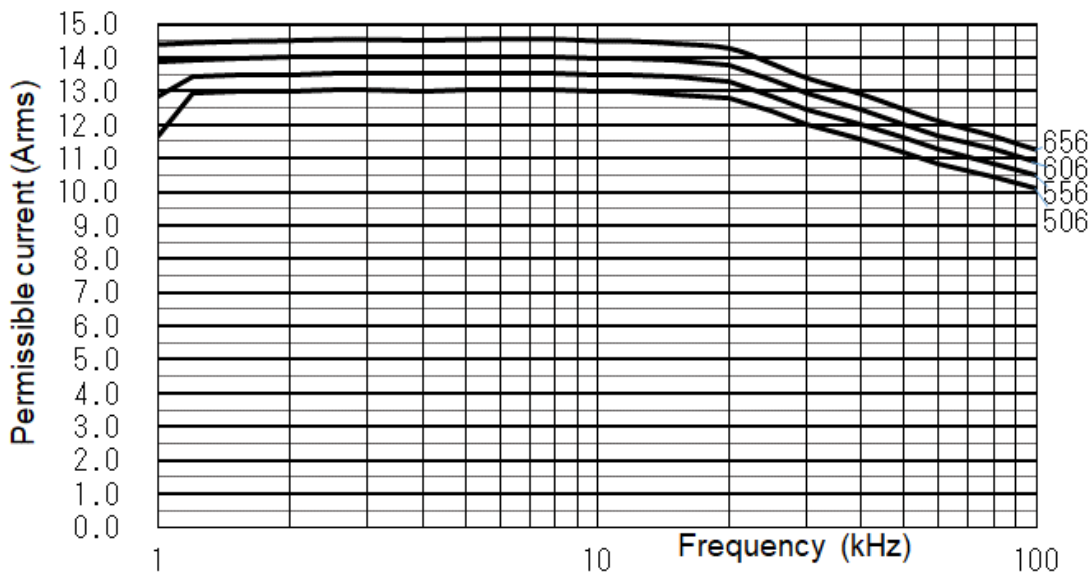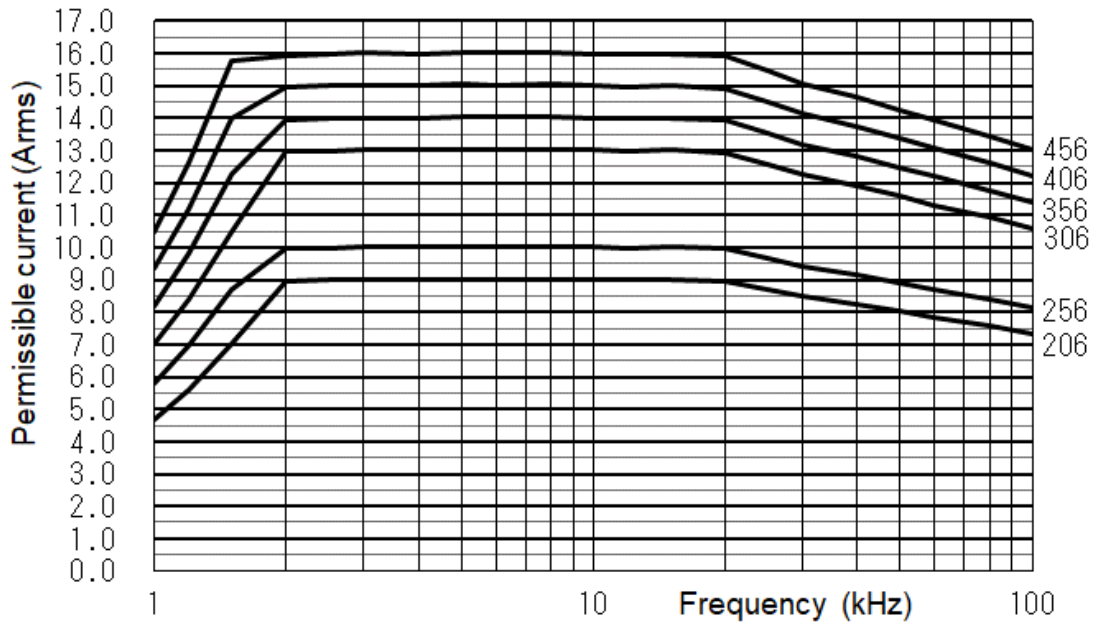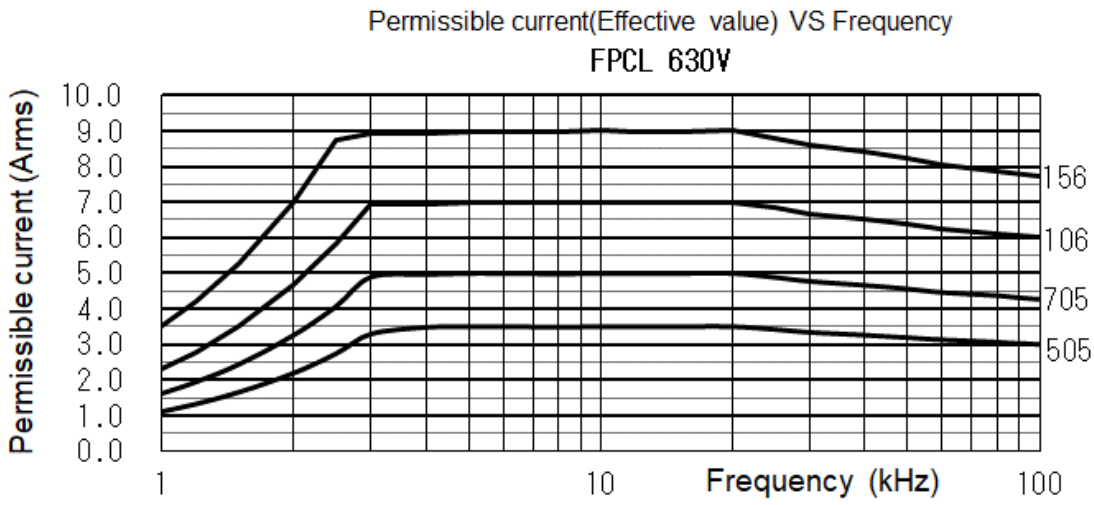




Capacitors for Power Electronics

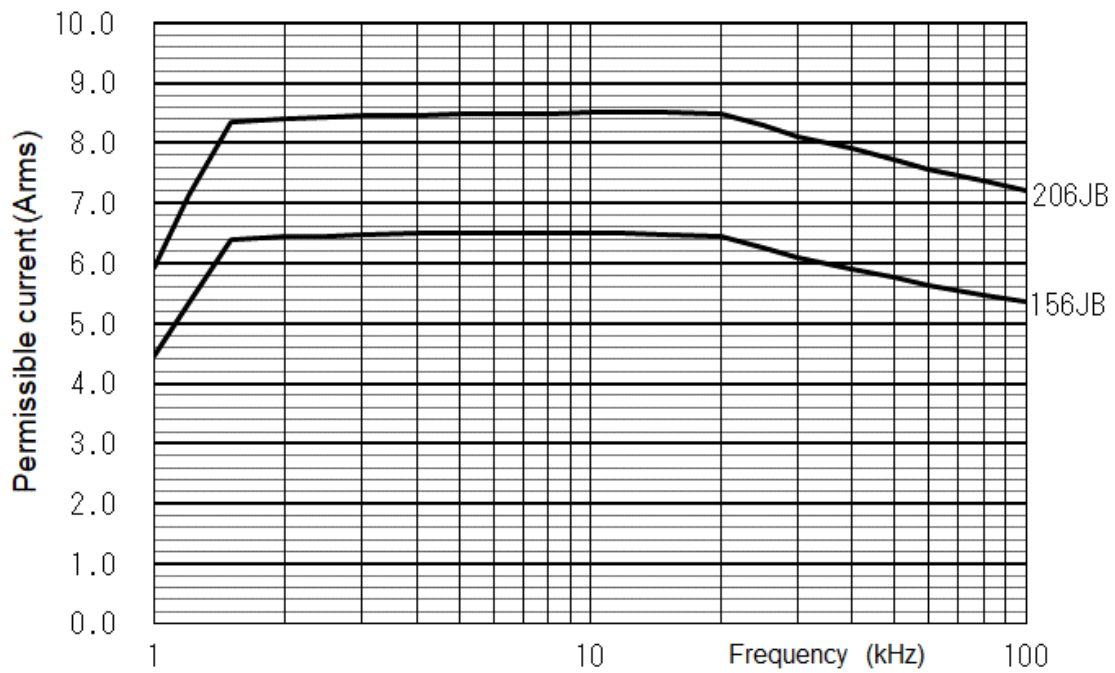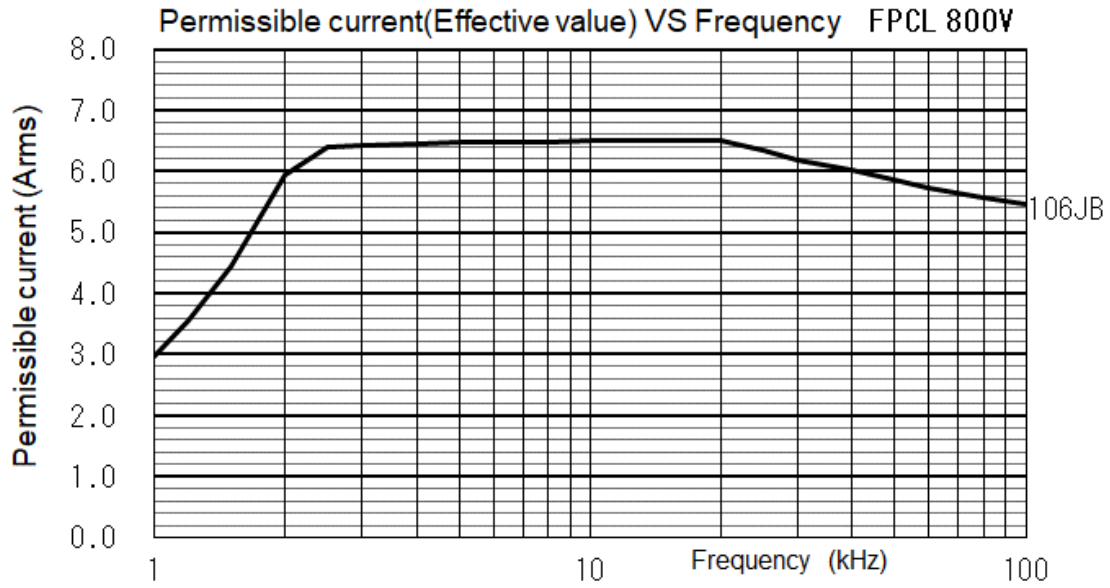

Capacitors for Power Electronics

Permissible current(Effective value) VS Frequency




FPCL 1100V

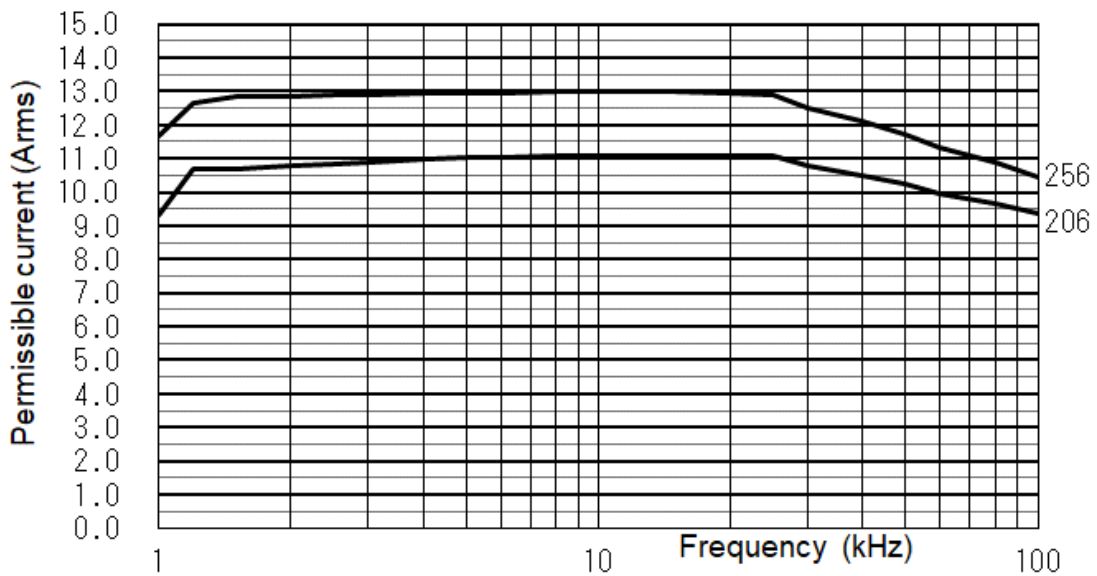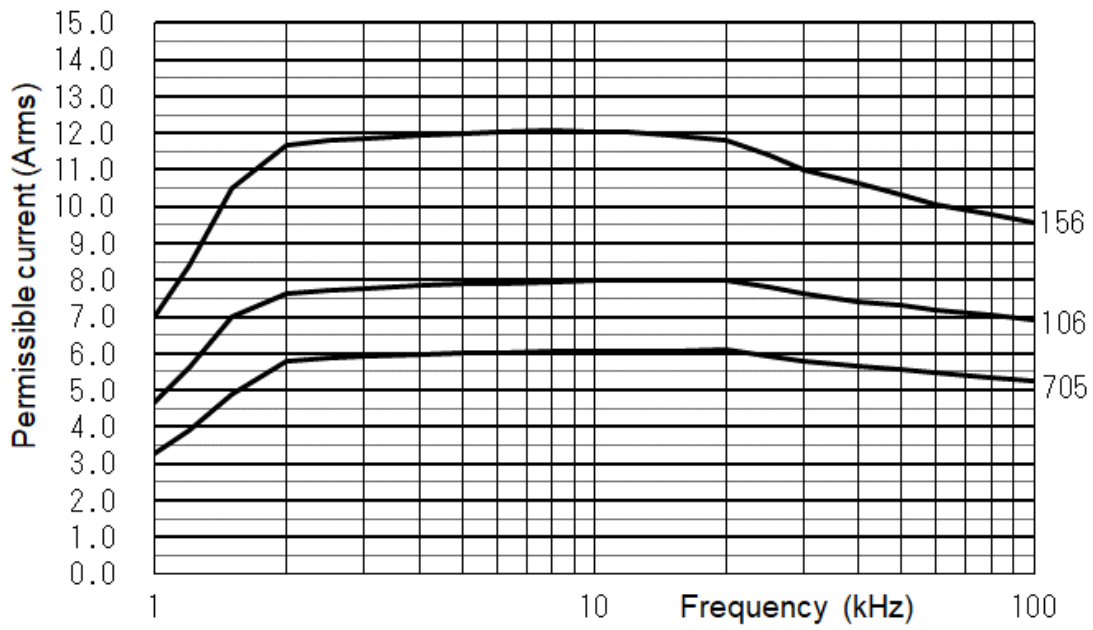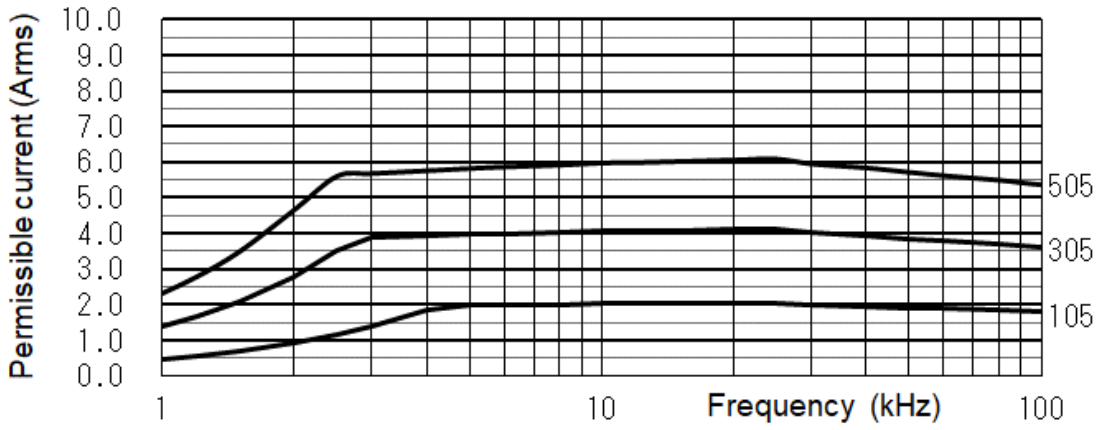

Capacitors for Power Electronics





Permissible current(Effective value) VS Frequency

FPCL 1300V

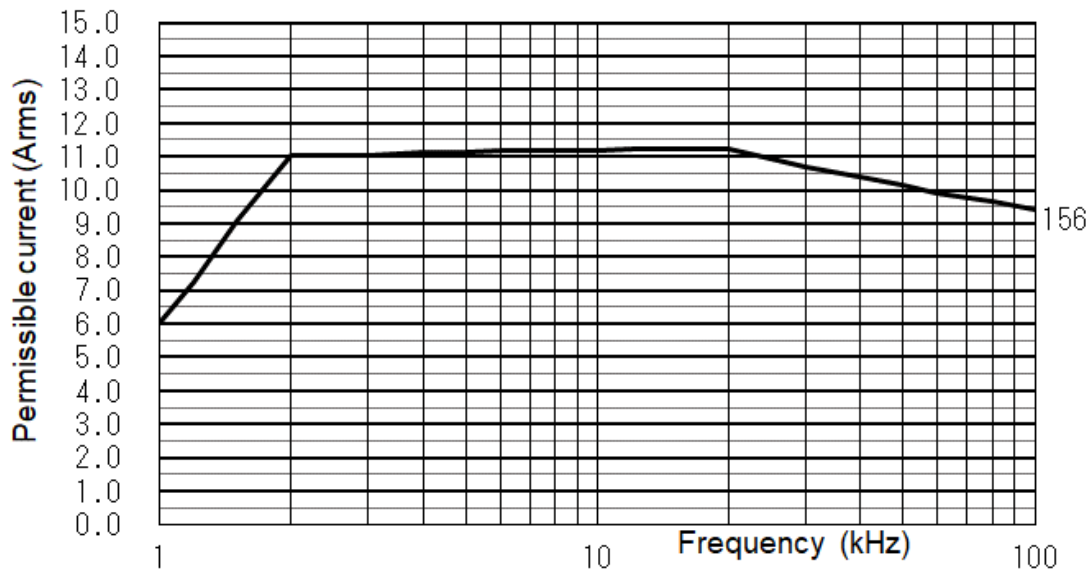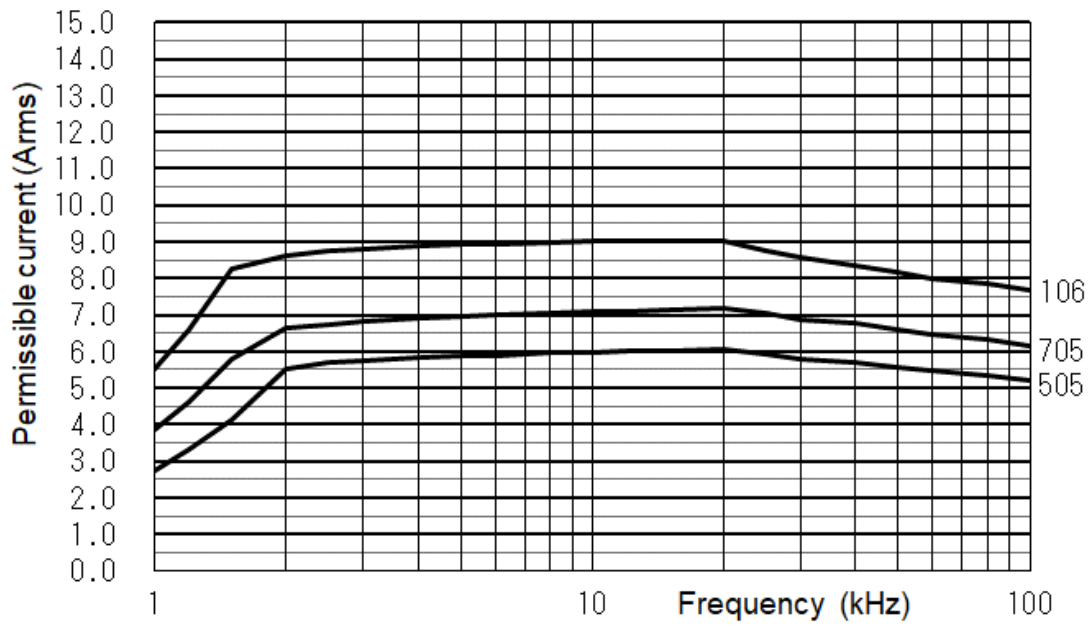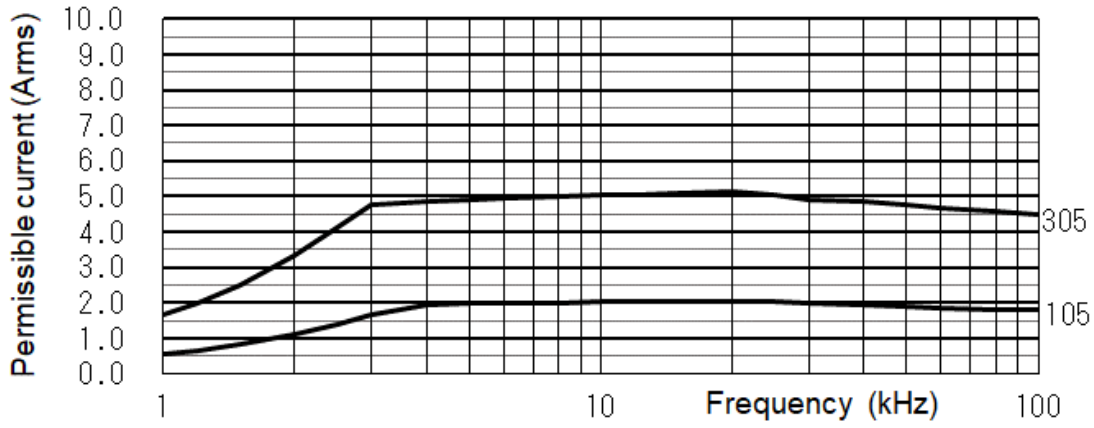

Capacitors for Power Electronics

● Lifetime expectancy (Reference data)

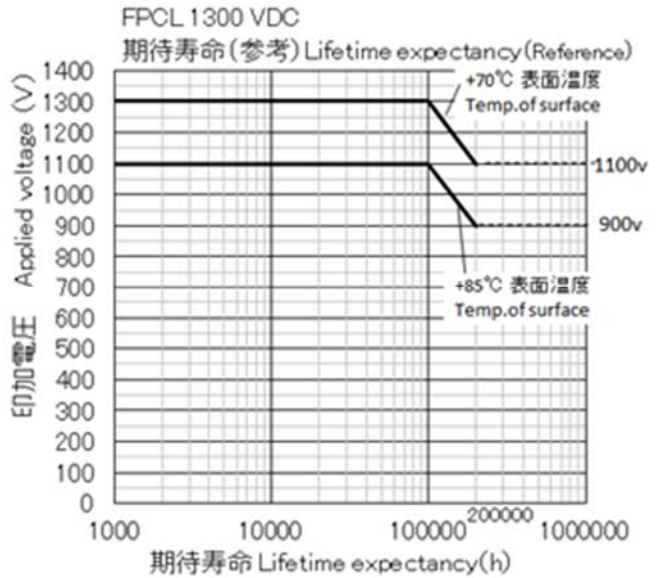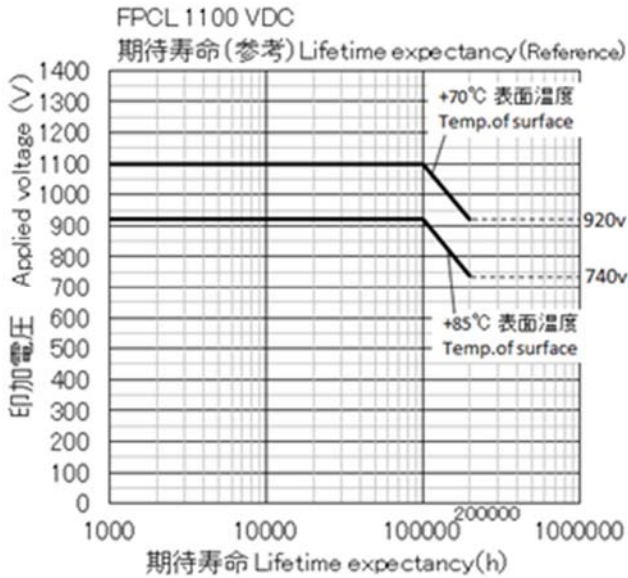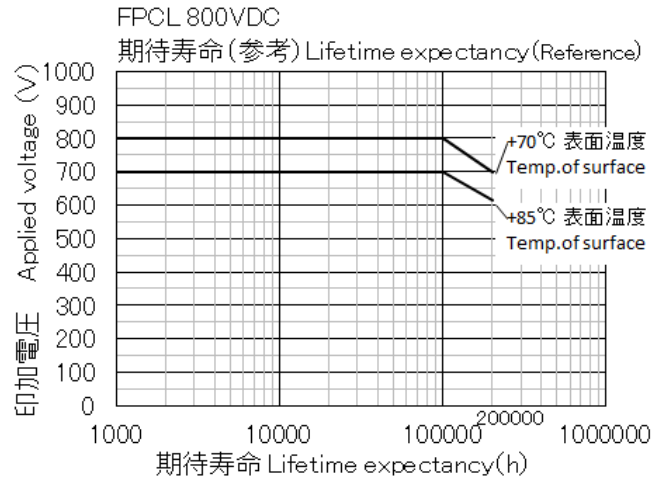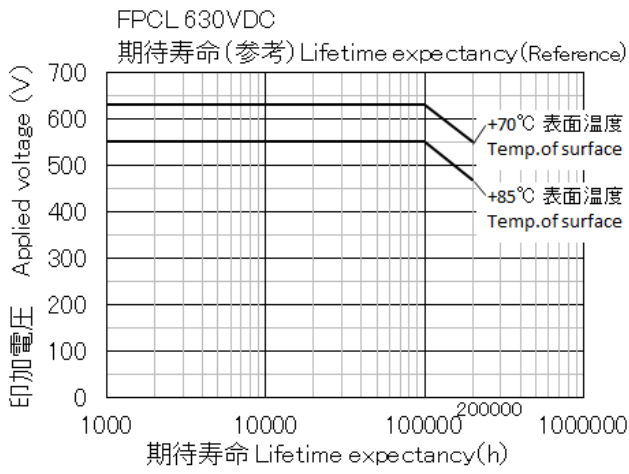

If you consider, please request materials such as specifications.
Other items (capacitance, rated voltage, etc.), please contact us.